



## 150A100C

- M1 through M5
- 150 Watts CW
- 10kHz–100MHz

### Features


The Model 150A100C amplifier is a self-contained, broadband unit designed for laboratory applications where instantaneous bandwidth, high gain and moderate power output are required. Utilization of push-pull MOSFET circuitry lowers distortion, improves stability and allows operation into any load impedance without damage. The Model 150A100C, when used with an RF sweep generator, will provide a minimum of 150 watts of swept power.

There is a digital display on the front panel to indicate the operate status and fault conditions when an over temperature, power supply, or amplifier fault has occurred. The unit can be returned to operate when the condition has been cleared. The 150A100C includes digital control for both local and remote control of the amplifier. This 8-bit RISC microprocessor controlled board provides both IEEE-488 (GPIB) and asynchronous, full duplex RS-232 control of all amplifier functions.

Housed in a stylish, contemporary enclosure, the Model 150A100C provides readily available RF power for typical applications such as RF susceptibility testing, antenna and component testing, watt meter calibration, and use as a driver for higher power amplifiers.

The export classification for this equipment is EAR99. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

150A100C Typical Power Output

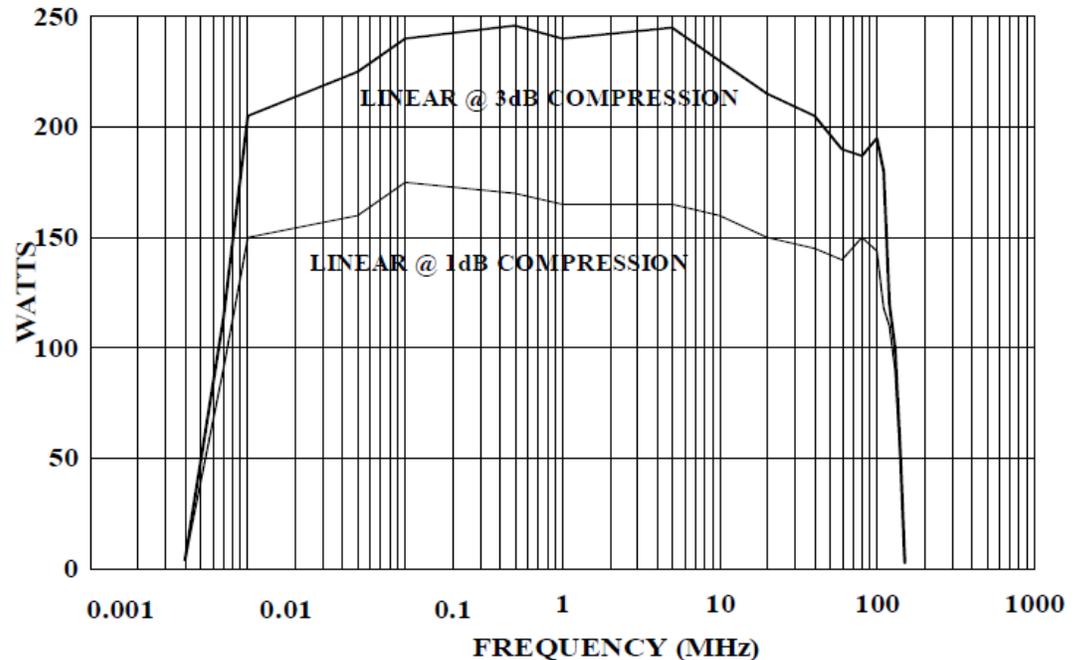

AR RF/Microwave  
Instrumentation  
160 School House Rd  
Souderton, PA 18964  
215-723-8181

For an applications engineer call: 800.933.8181

[www.arworld.us](http://www.arworld.us)



# 150A100C

- M1 through M5
- 150 Watts CW
- 10kHz–100MHz

## Specifications

**RATED POWER OUTPUT:** 150 watts

**INPUT FOR RATED OUTPUT:** 1.0 milliwatt maximum

**POWER OUTPUT @ 3dB COMPRESSION:**  
Nominal: 220 watts; Minimum: 180 watts

**POWER OUTPUT @ 1dB COMPRESSION:**  
Nominal: 155 watts; Minimum: 125 watts

**FLATNESS:** 1.5 dB maximum

**FREQUENCY RESPONSE:** 10 kHz - 100 MHz instantaneously

**GAIN:** 52 dB minimum

**GAIN ADJUSTMENT RANGE:** 18 dB minimum

**INPUT IMPEDANCE:** 50 ohms, VSWR 1.5:1 maximum

**OUTPUT IMPEDANCE:** 50 ohms, VSWR 2.0:1 maximum

**MISMATCH TOLERANCE:** 100% of rated power without foldback. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. See Application Note #27.

**MODULATION CAPABILITY:** Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal.

**NOISE FIGURE (above 1.0 MHz):** 6 dB typical

**HARMONIC DISTORTION:** Minus 20 dBc maximum at 125 watts

**THIRD ORDER INTERCEPT POINT:** 58 dBm typical

**PRIMARY POWER:** 90–135/180-270 VAC auto ranging 47–63Hz, single-phase; 1000 watts maximum

**REMOTE INTERFACES:** IEEE-488, RS-232

**CONNECTORS:**  
RF Type N female. See Model Configurations for location.

**REMOTE CONTROL**  
IEEE-488 24 pin male  
RS-232 9 pin Subminiature D (male)

**REMOTE INTERLOCK:** 15 Pin Subminiature D

**COOLING:** Forced air (self contained fans)

**EXPORT CLASSIFICATION:** EAR99

## Model Configurations

MODEL NUMBER	RF INPUT	RF OUTPUT	WEIGHT	SIZE (WxHxD)
150A100C	Front panel	Front panel	31.75 kg (70.0 lb)	50.3 x 25.2 x 46.0 cm 19.8 x 9.9 x 18.1 in
150A100CM1	Rear panel	Rear panel	31.75 kg (70.0 lb)	50.3 x 25.2 x 46.0 cm 19.8 x 9.9 x 18.1 in
150A100CM2	Same as 150A100C with enclosure removed for rack mounting		22.15 kg (49.0 lb)	48.3 x 22.25 x 43.2 cm 19.0 x 8.75 x 17 in
150A100CM3	Same as 150A100CM1 with enclosure removed for rack mounting		22.15 kg (49.0 lb)	48.3 x 22.25 x 43.2 cm 19.0 x 8.75 x 17 in
150A100CM4	Same as 150A100C and harmonic distortion is -25 dBc at 100 watts		31.75 kg (70.0 lb)	50.3 x 25.2 x 46.0 cm 19.8 x 9.9 x 18.1 in
150A100CM5	Same as 150A100C with >200W P3dB 1-3.5MHz		31.75 kg (70.0 lb)	50.3 x 25.2 x 46.0 cm 19.8 x 9.9 x 18.1 in