

AA26G40

- 1 Watt CW
- 26.5–40 GHz
- 20 V/m & 50 V/m min field strength options @ 1 meter test distance
- CE, RoHS and WEEE compliant

Features

The Model AA26G40 is a solid-state, air-cooled, broadband field generating system designed for applications where low-level, high-frequency fields are required. Included is a tripod-mountable amplifier/antenna field generating unit.

The Model AA26G40, when used with an external signal generator, will provide a minimum of 20 V/m or 50 V/m field strength at a distance of 1 meter. The AA1000 is recommended for providing DC power, RF signal routing and fault detection to the AA26G40. The AA26G40 is protected from over-temperature through forced-air cooling.

The export classification for this equipment is 3A001.



Specifications

RATED FIELD STRENGTH: Minimum 20 V/m or 50 V/m at 1 meter distance

MAXIMUM AMPLIFIER INPUT: +10 dBm max

FREQUENCY RESPONSE: 26.5–40 GHz instantaneous

3dB BEAMWIDTH:

AA26G40-20: E Plane: 16.7 degrees
H Plane: 18.3 degrees

AA26G40-50: E Plane: 8.1 degrees
H Plane: 9.7 degrees

3dB SPOT SIZE @ 1m:

AA26G40-20: 0.60m x 0.66m

AA26G40-20: 0.29m x 0.34m

MODULATION CAPABILITY: Will faithfully reproduce AM, FM, or Pulse modulation appearing on input signal.

SPURIOUS: Minus 65 dBc typical

PRIMARY POWER (Supplied by AA1000): 8 VDC @ 6 Amps max, +24VDC @ 1 Amp max

CONNECTORS:

RF Input: 2.92 mm (K-type) female
DC Input: Twinax

COOLING: Forced air (self contained fans)

WEIGHT:

AA26G40-20: 2.5kg (5.5lb)

AA26G40-50: 2.7kg (6lb)

SIZE (W x H x D):

AA26G40-20: 12.1cm x 18.4cm x 15.2cm
(4.75in x 7.25in x 6in)

AA26G40-50: 12.1cm x 18.4cm x 25.4cm
(4.75in x 7.25in x 10in)

ENVIRONMENTAL:

Operating Temperature: 5°C/+40°C

Operating Altitude: up to 2000M

Shock and vibration: Normal Truck Transport

REGULATORY COMPLIANCE:

EMC EN 61326-1

Safety UL 61010-1

CAN/CSA C22.2 #61010-1

CENELEC EN 61010-1

RoHS DIRECTIVE 2011/65/EU

WEEE DIRECTIVE 2012/19/EU

EXPORT CLASSIFICATION: 3A001

AR RF/Microwave
Instrumentation
160 School House Rd
Souderton, PA 18964
215-723-8181

For an applications engineer call: 800.933.8181


www.arworld.us

ISO 9001 Certified

AA26G40

- 1 Watt CW
- 26.5–40 GHz
- 20 V/m & 50 V/m min field strength options @ 1 meter test distance
- CE, RoHS and WEEE compliant

Ordering Options

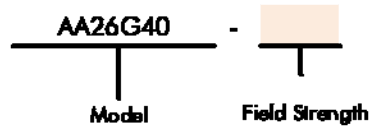

FIELD STRENGTH	
20 V/m (Lo-Field)	20
50 V/m (Hi-Field)	50

Contact your AR RF/Microwave Instrumentation Sales Associate for specific model configuration pricing.